


BAC 50



| Features | BAC 50 |
|-------------------------|----------------------------|
| Outer dimensions-Inches | 24 W x 16.1 L x 19.1 H |
| Inner dimensions-Inches | 18.9 W x 11 L x 13 H |
| Volume | 44 litres / 12 US gal. |
| K value | 0.46 W/m ² .K |
| Weight | 17 Kg / 37 Lb |
| Insulation material | Expanded polyurethane foam |
| Material of the walls | Fibreglass/polyester |

Specifications and optional equipment

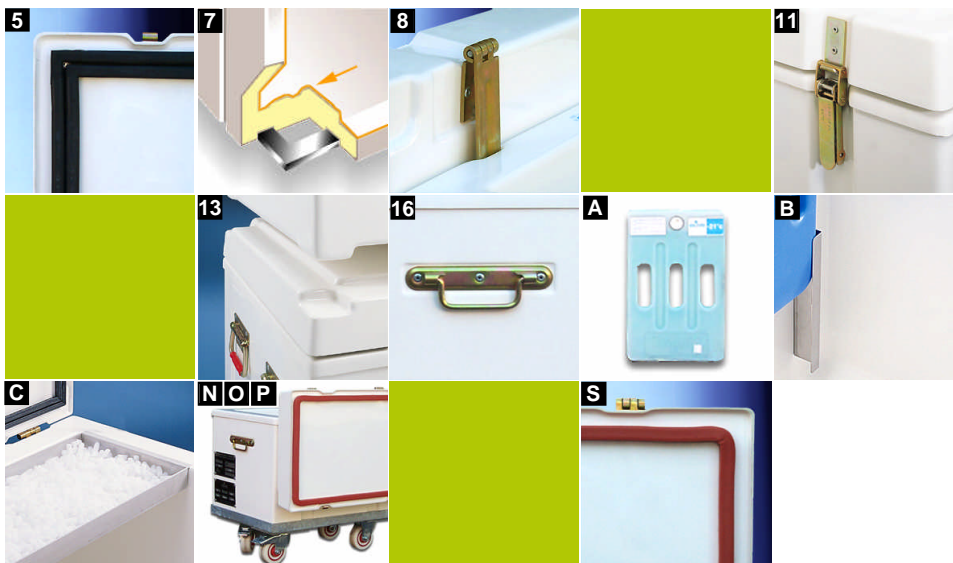

Technical features

- 5 One-piece EPDM seal.
- 7 Body and lid are moulded in Fibreglass/polyester and coated with white gelcoat. Insulation with CFC free expanded polyurethane foam.
- 8 Lid fitted with 2 hinges can be pushed fully backwards.
- 11 Flush mounted and recessed fastener
- 13 Stackable Bac 50 with embossed bottom and lid from moulding.
- 16 2 flush-mounted handles

Optional equipment

- A Eutectic plate TOP 55
- B Eutectic plate support stainless steel
- C Dry ice drawer
- N Castor base fitted with 2 fixed and 2 swivelling wheels ø 3.94 inches
- O Castor base fitted with 2 fixed and 2 swivelling wheels ø 3.94 inches with brake
- P Castor base fitted with 4 swivelling wheels ø 3.94 inches, 2 with brake.
- S Silicone seal

Tel : (561) 432 - 8940
 Fax : (561) 432 - 3420
www.hermaniag.com