


## BAC 600



Features	BAC 600
Outer dimensions-Inches	47.2 W x 47.2 L x 38.2 H
Inner dimensions-Inches	39.4 W x 39.4 L x 23.6 H
Volume	600 litres / 159 US gal.
K value	0.25 W/m <sup>2</sup> .K
Weight	122 Kg / 268 Lb
Insulation material	Expanded polyurethane foam
Material of the walls	Fibreglass/polyester

## Specifications and optional equipment

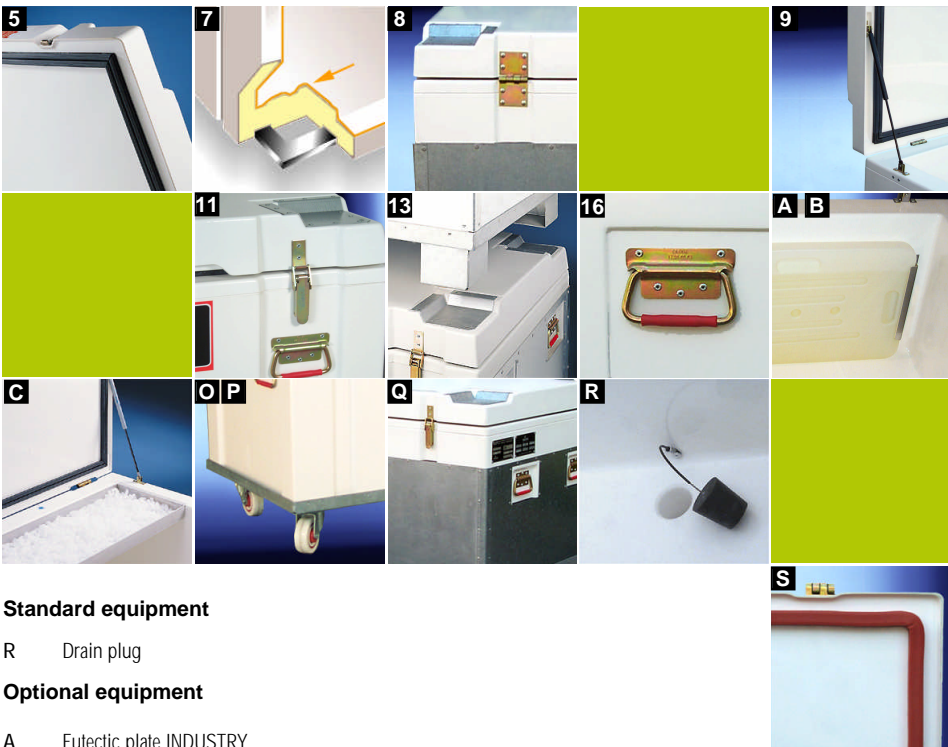

### Technical features

- 5 One-piece EPDM seal.
- 7 Body and lid are moulded in Fibreglass/polyester and coated with white gelcoat. Insulation with CFC free expanded polyurethane foam.
- 8 Lid fitted with 2 hinges
- 9 Hinging from moulding and 95° lid opening with 2 gas jacks.
- 11 Flush mounted and recessed fastener
- 13 Stackable Bac 600 on metal feet and lid fitted with stacking locations.
- 16 8 flush-mounted handles (2 by side)

### Standard equipment

- R Drain plug

### Optional equipment

- A Eutectic plate INDUSTRY
- B Eutectic plate support stainless steel
- C Dry ice drawer
- O Castor base fitted with 2 fixed and 2 swivelling wheels ø 4.92 inches with brake
- P Castor base fitted with 4 swivelling wheels ø 4.92 inches 2 with brake.
- Q Metal frame only with fixed castor base
- S Silicone seal

Tel : (561) 432 - 8940

Fax : (561) 432 - 3420

[www.hermaniag.com](http://www.hermaniag.com)